


Rakks®

In supporting roles everywhere

Rakks Surface Mount & Inside Wall Mount Bench Supports Information & Installation

Made in the USA. Used for seating applications incorporating 5" wooden planking or solid tops. The supporting arm is pre-drilled with 12 holes to provide secure installation. Manufactured from 2" x 3" T to provide maximum stiffness. Surface mounted configuration brackets are screwed into studs or blocking of the finished wall. Using our rugged EHB (Inside the wall) configuration fabricated with 2"x3" T & 2"x 2" L, the vertical leg is screwed to the side of the stud and hidden behind the drywall. Stocked in mill (unfinished) aluminum, off-white powder-coat, primed, black powder-coat and clear anodized aluminum.

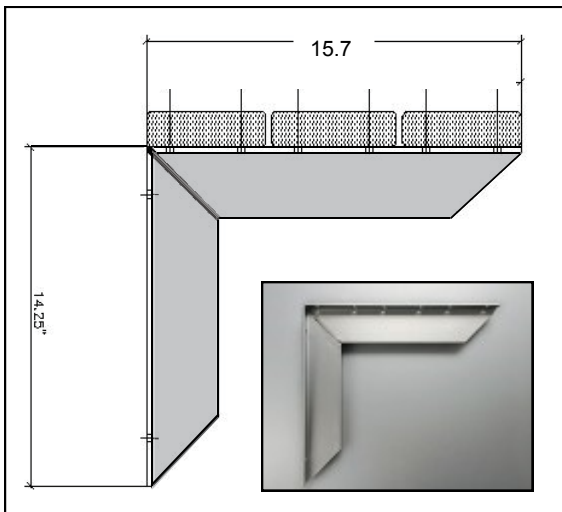


EH-1416B **SURFACE MOUNT** Bench Bracket



EH-1416B **SURFACE MOUNT** Bench Bracket



EHB **INSIDE WALL** Bench Bracket

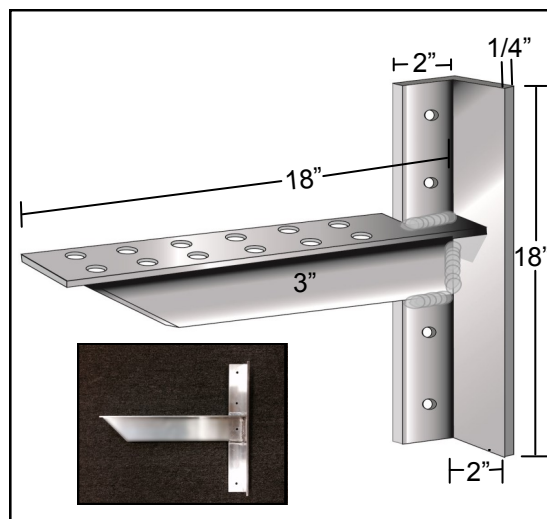

EHB **INSIDE WALL** Bench Bracket

Engineered and manufactured in the United States by: Rangine Corporation,
Needham, Massachusetts 02494 Tel: 781-455-8700, 800-826-6006,
Fax: 781-455-8702, www.rakks.com


March 2016



In supporting roles everywhere

Floor Mounted Pedestal Bench Bracket Information & Installation

Made in the USA, Rakks Pedestal Bench Brackets provide exceptionally strong support for benches used in Locker rooms, Fitting rooms, and Dressing rooms. Offered in two configurations: Single Arm and Double Arm. Single Arm is used in close proximity to a supporting wall. Double Arm is easily used singularly or in a continued row. Available in 24" and 18" height, with a 20" maximum seat depth, and 4" x 8" base. When properly installed Pedestal Bench Brackets can support loads up to 400 pounds, using wooden planking or solid top. Manufactured from 2" x 3" T aluminum, Pedestal Brackets are rust-proof and are made to provide maximum stiffness. At the base, brackets are drilled at 1/2" diameter for easy installation. Available in Clear Anodized aluminum. Black powdercoat and White powdercoat are made to order.

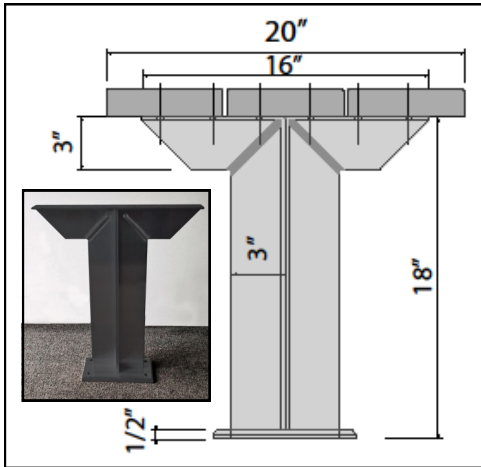

Double Arm Floor Mount Bench Bracket



Double Arm Floor Mount used in a single bench configuration


INSTALLATION: There are two basic steps to assembly and installation:

Rakks Pedestal Bench Bracket is Assembled to the Bench

Place Bench top on a counter or solid surface. Adjust the position of the bench pedestal so that it is centered front to back. When used as a single independent bench, each Bench Bracket should be installed 6" from the left and right ends of the bench top. Mark holes and drill 3/16" pilot hole and tighten securely. When used in a continued run, Bench Tops can be joined together on a single Pedestal Bench Bracket. The first and last bracket should allow a 6" overhang, as above.

The Assembled Bench is then bolted to the floor.

Pedestals Bench Brackets should be no greater than 36" apart. For typical concrete and wood installation Rakks recommends using the 3/8" diameter x 2" stainless steel hexagonal lag bolts included. **Note: Failure to bolt the bench assembly to the floor could result in injury.**

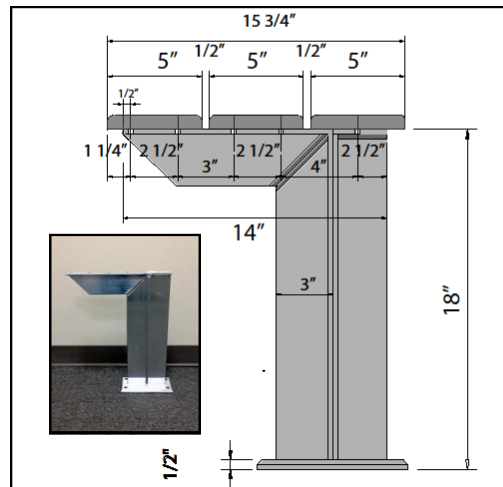

Single Arm Floor Mount Bench Bracket