




In supporting roles everywhere

Rakks "E" Standards Information & Installation

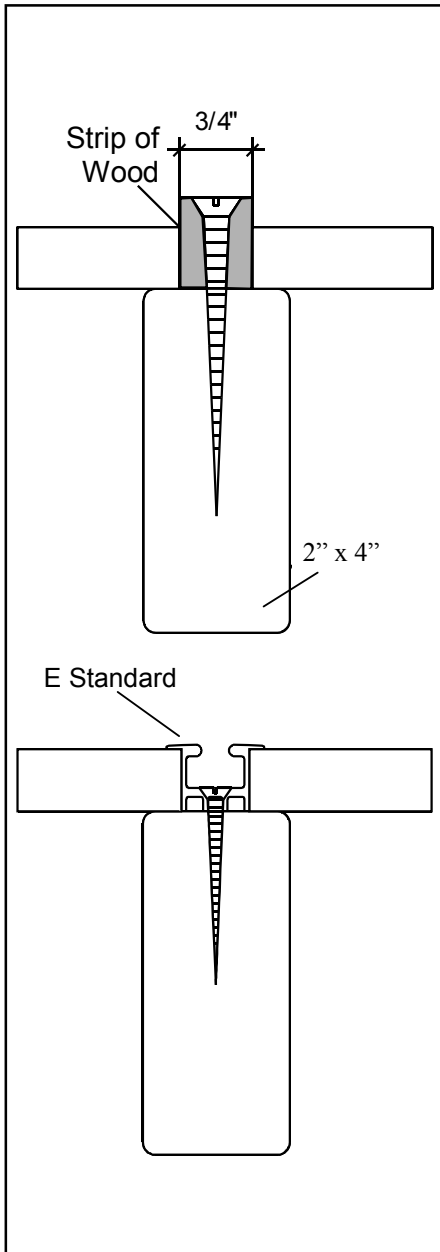

Rakks "E" Standards are designed to be flush mounted on the wall protruding a mere 1/8" from the wall surface.

NOTE: All standards should be mounted directly on studs or blocking.

1. Determine where the standards are supposed to be placed.
2. Tack a strip of wood, exactly 3/4" wide, plumb, on the desired location.
3. Sheet rock right up to the edge of the strip. **DO NOT JOINT COMPOUND BETWEEN THE WOOD STRIP AND THE SHEET ROCK.**
4. Remove the wood strip and screw the "E" Standard in its place using the screws provided.