


Universal Bracket Information & Installation

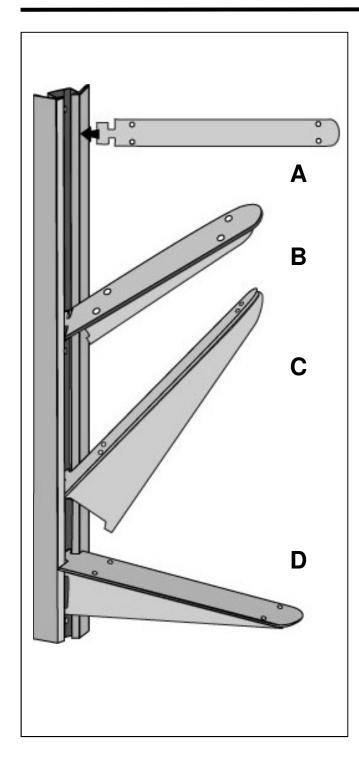

Universal Shelf Brackets fit all Rakks wall mounted standards and poles. They are infinitely adjustable and can be installed into standards at any point.

Universal Brackets feature a 1" wide horizontal surface pre-drilled with four holes. Two shelves can join over a single bracket and be secured with screws.

Universal Brackets come in two sizes:

<u>Model</u>	Usable	Shelf	Load
	<u>length</u>	<u>Dept</u>	<u>Capacity</u>
BU-009	9"	9" -11"	70#
BU-012	11 3/4"	12" - 14"	60#

Capacities are based on evenly distributed loads front-to-back with the shelf depths as shown above.

Shorter sizes are available by special order.

Installation

- 1. Insert the back tab of the bracket into standard or pole channel (fig A).
- 2. Carefully twist and rotate the bracket to a 45 degree position (fig B & C). A firm twist may be required. Caution: do not "force" the bracket into position as this may bend and weaken the back tab of the bracket.
- 3. Slide the bracket to the desired height and lock the bracket into the horizontal position (fig D).

Engineered and manufactured in the United States by: Rangine Corporation, Needham, Massachusetts 02494 Tel: 781-455-8700, 800-826-6006 Fax: 781-455-8702 www.rakks.com