

Fixed Floating Aluminum Shelf




Rakks Floating Shelves come with pre-drilled and counter-sunk mounting holes. Holes are drilled at 16" centers. #10 x 2" Philips flat-head screws are included.

Custom lengths and hole locations can be specified to allow the precise positioning of the shelves along the wall. Shelves can be ordered in lengths up to 98". Alignment pins can be used to join multiple shelf sections end-to-end to create even longer runs.

Shelves are stocked in clear anodized aluminum finish. Custom anodized and powder-coated finishes are available.

Brackets must be screwed into studs or blocking. Wall anchors can not be used. When properly installed (with all screws fully engaged), shelves can support static loads of up to 10 pounds per linear foot.

Stocked lengths and hole configurations

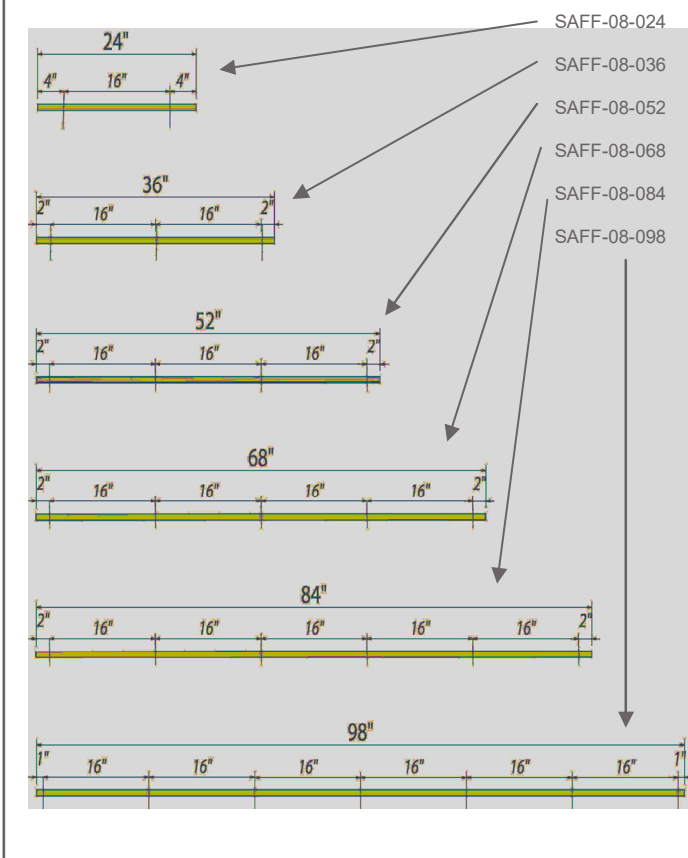

Installing Rakks Floating Aluminum Shelves

1. Using the drilling guide provided, pre-drill holes or hand hold the shelf against the wall and at desired height drill 5/32" pilot holes angled up into the wall. Make sure shelves are level and holes are drilled at a 34 degree angle.

2. Install #10 screws (provided) into wall making sure all screws are fully engaged and securely tightened.

