


Used with Rakks poles to support and frame 1/4" thick decorative panels. Framing channels are manufactured to order to fit any panel width up to four feet. ***Note: Panel Framing Channels and poles can be fabricated to accept up to 3/8" thick panels.**

Panel Framing Channels lock securely into the pole and are held in place by channel nut plates. **Note: Panels should be cut 3/4" wider than the inside pole to pole dimensions.**

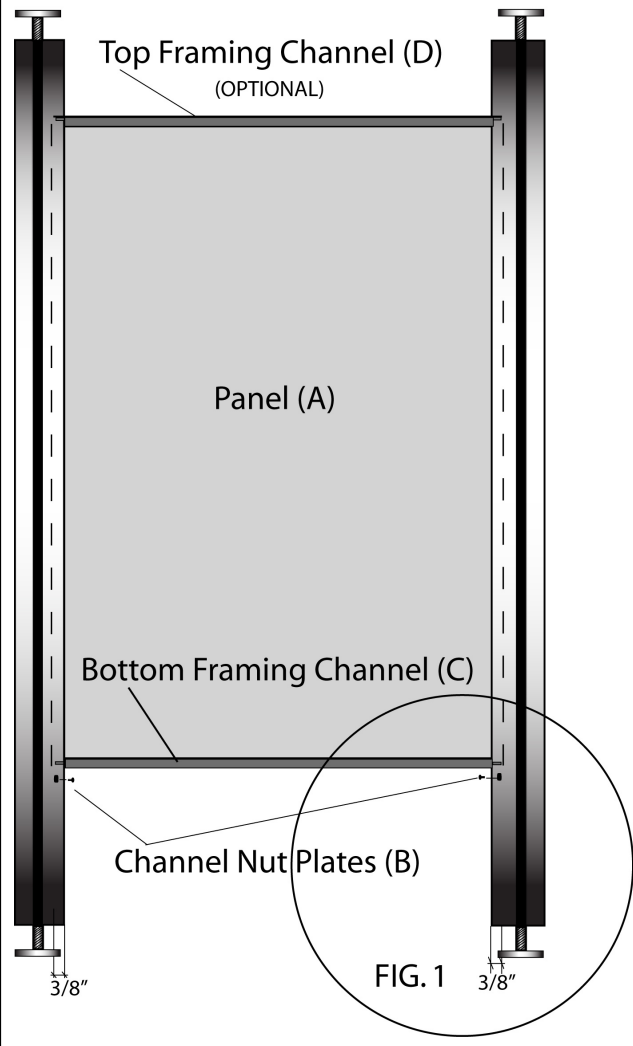

Installation

1. Position the **Panel (A)** between the poles so that the vertical edges of the panel fit into the pole channels.
2. Raise (and temporarily support) the panel above the desired location of the **Bottom framing channel (C)**
3. Install **Channel Nut Plates (B)** into each pole at the desired height to support the bottom framing channel. Securely tighten set screws with Allen wrench.
4. Install the **Bottom framing channel (C)** into the poles so that the tabs rest on the **Channel Nut Plates (B)**
5. Carefully lower the **Panel (A)** so that it fits into and is supported by the bottom framing channel.
6. Install the **Top framing channel (D)** to create a finished look.

